

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

# Patent Abstracts of Japan


PUBLICATION NUMBER : JP60179857  
PUBLICATION DATE : 13-09-85  
APPLICATION NUMBER : JP840036805  
APPLICATION DATE : 28-02-84

VOL: 10 NO: 30 (P - 426 )  
AB. DATE : 05-02-1986 PAT: A 60179857  
PATENTEE : FUJITSU KK  
PATENT DATE: 13-09-1985

INVENTOR : SEKI KAZUHISA

INT.CL. : G06F12/08; G06F12/16

TITLE : CONTROL SYSTEM OF CACHE  
DEVICE

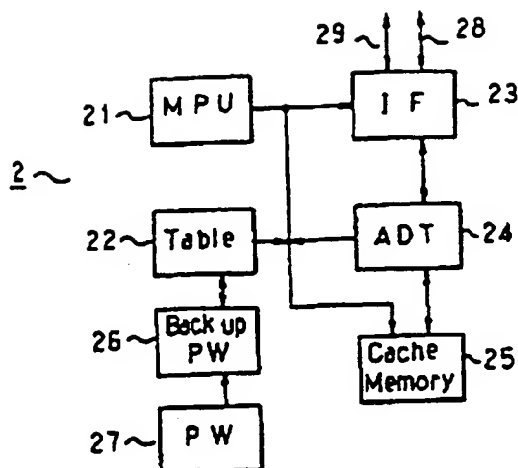

ABSTRACT : PURPOSE: To return a cache device to a state immediately before the disconnection of a power supply and to drive instantaneously the device by transferring data existing in the cache memory at the OFF of the power supply from a disc to the memory at the rerise of the cache device.  
CONSTITUTION: Data having high frequency are stored in the cache memory 25 and addresses on a disc device 3 in which these data exist are registered in a control table 22. If a power supply 7 is turned off under said status, a backup power supply is turned on by a disconnection signal to protect information in a control table 2. At the time turning on the power supply again, address information registered in the control table 2 is read out by a microprogram from an MPU 21 and the disc device 3 is accessed by using a control interface 28, an interface circuit 23 and a transfer circuit 24 to restore the corresponding data in the cache memory 25.